




MODEL · AMV 4V310 SC5/2

Detail Specification

Type:	5/2 way Double Coil
Body:	Aluminium
Acting:	Piloted
Insulation Class:	Class "F"
Duty Cycle:	ED 100
Protection Class:	IP65 (DIN40050)
Voltage tolerance:	±10%
Voltage:	220VAC / 110VAC / 24VAC / 24VDC / 12VDC Explosion Proof Coil - with wire available
Working Pressure:	0.5~0.8Mpa
Manual Override:	Locking Type
Lubrication:	Not lubrication
Max. Operating frequency:	3 ~ 5 cycle / sec PER stop
Responde Time:	0.05 seconds
Operating temperature:	-20OC ~ 70OC
Fluid:	Air

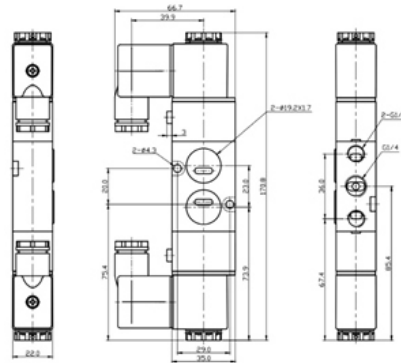

MODEL · AMV 4V310 DC3/2

Detail Specification

Type:	3/2 way Double Coil
Body:	Aluminium
Acting:	Piloted
Insulation Class:	Class "F"
Duty Cycle:	ED 100
Protection Class:	IP65 (DIN40050)
Voltage tolerance:	±10%
Voltage:	220VAC / 110VAC / 24VAC / 24VDC / 12VDC Explosion Proof Coil - with wire available
Working Pressure:	0.5~0.8Mpa
Manual Override:	Locking Type
Lubrication:	Not lubrication
Max. Operating frequency:	3 ~ 5 cycle / Sec PER stop
Responde Time:	0.05 seconds
Operating temperature:	-20OC ~ 70OC
Fluid:	Air

