


MODEL APL4N

Specification - APL 2N	Standard - APL 2N	Optional - APL 2N
Enclosure	Weather Proof IP 67 / NEMA 4X4 X	Weatherproof IP 68
	Explosion proof E Ex d IIB T6	
Cable Entries	Two NPT 3/2"	FOUR PF 3/4 PT 3/4 M20, M25
Ambient Temperature	-20OC to 80OC	
Terminal Strips	8 points (0.08-2.5m)	20 Points (0.08-2.5)
Position Indicator	0 ~ 90 (90 turn free join)	Three position L port / T port
	Close : Red, Open : Yellow	Close : Red, Open : Green
Switches	Mechanical Switch X 2 Proximity Sensor X 2	Mechanical Switch X4 Proximity Sensor x4
Potentometer	-	1k ohm standard. 5k ohm. 0-10k ohm
Current Output Signal		4-20mA DC 12.5 to 37VDC (24V typical)
Painting	Chrome Polyester powder coating (Black)	Nylon others on request Red, green, blue, yellow, silver

Dimensions · Apl 4N

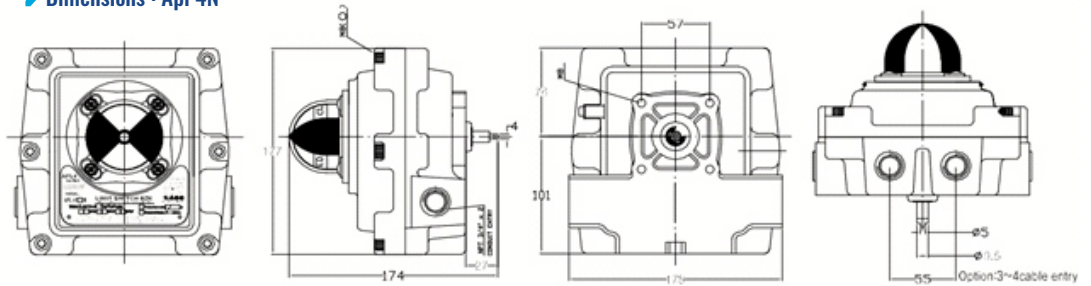

MODEL ITS 100

Specification - ITS 100	Standard - ITS 100	Optional - ITS 100
Enclosure	Weather Proof IP 67 O ring sealed	Weatherproof IP 68
Cable Entries	2 PT 1/2" standard threads	FOUR PF 3/4 PT 3/4 M20, M25
Ambient Temperature	-20OC to 80OC	-40OC to 100OC
Terminal Strips	8 points (0.08-2.5m)	
Position Indicator	0 ~ 90 (90 turn free join)	Three position L port / T port
	Close : Red, Open : Yellow	Close : Red, Open : Green
Switches	Proximity Sensor X 2	
Potentometer	-	1k ohm standard. 5k ohm. 0-10k ohm
Current Output Signal		4-20mA DC 12.5 to 37VDC (24V typical)
Painting	Chrome Polyester powder coating (Black)	Nylon others on request Red, green, blue, yellow, silver

Dimensions · ITS 100

