

Motorized UPVC Wafer Type Butterfly Valve

Pneutork make electrical On/Off, Modulating and integral starter UPVC butterfly valve now come with an update design that offers angle switching control. Increased neck height makes it easier to install. Sealing surface and through hole are processed on CNC machines for reliable and enhanced sealing performance.

Size Range: 2" to 8" (40mm to 200mm)

Higher size available on request

Butterfly Valve Specification.


Body	UPVC
Disc	Polypropylene
Pressure	7kg/cm ²
Temperature	Upto 80OC
End	Wafer type

Advantages

- » Improve PP Disc to enhance the performance.
- » Thickness body and seal to extend the service life.
- » Materials meet drinking water standard.
- » 100% pure virgin material, CaCO₃ free (chalk).
- » UV resistant powder added.
- » Can be assembled with pneumatic actuator.



Item	Type of Test	Testing Pressure	Operating Temperature Normal
Valve Body	Hydraulic	150 PSIG	Max. 80°C
Seat	Hydraulic	100 PSIG	Max. 80°C

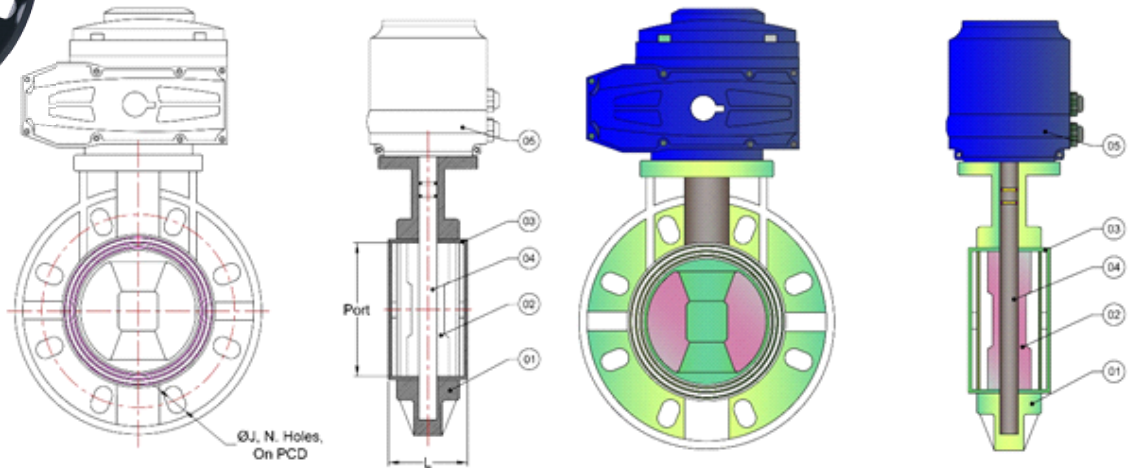

No.	Description	Material	Qty.
1	Body	UPVC	01
2	Disc	Polypropylene	01
3	Shaft	AISI 410	01
4	Seat	NBR	01
5	Electric Actuator	Standard	01

Valve Size		PORT	L	ØD	ØJ	N	PCD
MM	Inch						
50	2"	54	44.5	160	20	4	123
65	2.1/2"	67	48	184	21	4	143
80	3"	83	53	198	21	8	157
100	4"	101	57	231	24	8	186
125	5"	127	68	257	24	8	213
150	6"	152	73	285	24	8	240
200	8"	200	92	340	24	8	296

Optional electrical actuator on/off, modulating and integral starter on above valves



For detailed information refer page no. : XX to XX

For detailed information refer page no. : XX to XX

For detailed information refer page no. : XX to XX